

FENIX
LIGHTING FOR EXTREMES




ARE-D1

SINGLE CHANNEL SMART CHARGER


Micro USB charging and USB discharging

2000mA large current for charging

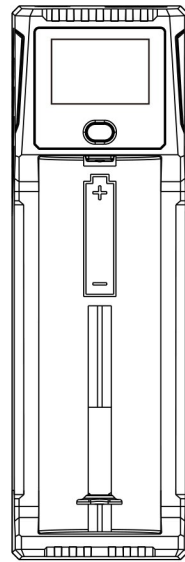

Pic 1
圖1
Fig. 1
dessin 1
Pic. 1
Foto 1
Bild 1

High-resolution LCD screen



Pic2
圖2
Fig. 2
dessin 2
Pic. 2
Foto 2
Bild 2

USB port

Micro USB port

(English) Product Features

- Compatible with the following battery types:
 - Li-Ion: 10440, 14500, 16340, 18650, 21700, 26650;
 - Ni-MH/Ni-Cd: AAA, AA, C.
- Micro USB charging, and USB discharging.
- LCD screen for battery level, charging and discharging status.
- 0.5/1.0/2.0A - three charging current for option.
- Short circuit protection, over-current protection, over-voltage protection and reverse-polarity protection.
- Micro-computer chip controlled digitally regulated charging to extend battery lifetime.

Specification Parameters

- Input: Micro USB 5V/2A charging, from external power source.
- Rated output power: 3W (Ni-MH/Ni-Cd), 8.4W (Li-Ion).
- To charge the battery, the details are as follows:

Operating Mode	To charge the batteries	
	Voltage	Current
	4.2V/3.65V	1.5V
	0.5A/1.0A/2.0A	0.5A/1.0A
Battery Type		AA
	18650	16340
	14500	10440

- USB output: 5V/2A, for external power source.
- Size: 4.72" x 1.50" x 1.18" (120 x 38 x 30 mm).
- Weight: 61±3 grams (excluding charging cable).
- Operating temperature: -20°C to 50°C.
- Operating humidity: 5% to 90%.
- Storage temperature: -20°C to 80°C.

Safety Specification

Compliant Standards: CE, FCC, RoHS, WEEE

How to use

1. Battery Insertion

- Keep the battery polarity markings in conformity with the charge markings (Only charge the allowed battery, and never charge non-rechargeable battery).
- After the battery being inserted, the LCD screen will light up (Pic 1) to display the current battery level, voltage, and type (Li-Ion or Ni-MH).

2. Battery Charging

- Micro USB port is the charging port (Pic 2). Connect to the power supply and insert the battery, the LCD screen will display the charging status and battery level. And the the battery icon on the screen will blink for 8 seconds, charging current can be selected within the 8 seconds by single clicking the button.
- The rated charging current is 1.0A, 0.5A, 1.0A and 2.0A can be selected for Li-Ion battery; 0.5A and 1.0A can be selected for Ni-MH/Ni-Cd battery.

Note:

- It is normal for the battery temperature to be below 55°C during charging, but due to the high-charging current, the battery may heat, so be careful of scalding.
- There will be no trickle charging if Li-Ion battery is fully charged to prevent overcharging.
- There will be trickle charging of 3-5mA of Ni-MH/Ni-Cd battery to ensure it is fully charged.

3. Battery Discharging

- After the rechargeable battery being inserted, connect the USB port of the charging device to the port of the charger's to start discharging. The maximum discharging current is 2A.
- When discharging, press and hold the button over 2 seconds, the "USB 5V" icon on the LCD display will continue to flash. At this time, the charger unlocks the small current (about 100mA) discharging mode, press the button again over 2 seconds, the "USB 5V" icon is always on and the small current discharging mode is limited.
- The LCD screen will display the current battery level and

voltage during the discharging process.

- This charger only works with Li-Ion battery discharging. When it is charging battery, the discharging function will be locked. When charging is stopped, the USB discharging function is unlocked and can be used for external devices.
- LCD Screen Display**
 - The LCD screen will display for 2 seconds after connecting to the power supply, (Pic 1)
 - If there is no battery in the channel, 2 seconds later, the LCD screen will only display the battery symbol, and then the screen will go out after 30 seconds. Single click the button, the screen will be lit up with the battery symbol displayed.
 - The battery type, capacity and charging status will be displayed after battery insertion. Single click the button to select charging current during the 8 seconds with the battery symbol displayed. Then single click the button - the screen will cycle through charging current (A)→battery voltage (V)→charging capacity (Ah)→charging time (T). Press and hold the button over 2 seconds to turn off the LCD screen. Single clicking the button again will turn on the LCD screen.
- Battery Level Indication**

The charger will automatically detect the battery level when battery is inserted in power source. The battery level will be displayed on the LCD screen through battery status bar, and then charging will start. If there is no power connected, the battery level can't be detected and displayed, even with battery inserted.

Battery level will be displayed as follows by the battery status bar:

One flashing, four off: less than 20%

One bar constant-on, one flashing, three off: 21% - 40%

Two bars constant-on, one flashing, two off: 41% - 60%

Three bars constant-on, one flashing, one off: 61% - 80%

Four bars constant-on, one flashing: more than 81%

Five bars constant-on: fully charged

LIGHTING FOR EXTREMES

"Follow" us for more information about Fenix.



FACEBOOK

FENIXLIGHT LIMITED

Tel: +86-755-29631163/83/93

Fax: +86-755-29631181

E-mail: info@fenixlight.com

Address: 8/F, 2nd Building,

DongFangMing Industrial Center,

33rd District, Bao'an, Shenzhen

518133, China

www.fenixlight.com



扫码并关注, 获取更多fenix资讯



61.139.201.021-A3-20190418

6. Short-circuit Protection

If short-circuit is detected, charging will autostop.

7. Reverse Polarity Protection

If the battery is inserted the wrong way around, charging will not begin.

8. Overcharge Protection

When fully charged, the charging current on the LCD screen will be displayed as 0.

Attention

- Only intended for rechargeable Li-Ion batteries, Ni-MH and Ni-Cd batteries. Other types of batteries may cause battery breach, leakage or explosion, and can cause damage to people and property.
- Use the battery charger in normal working condition and cut off the power completely after usage.
- Insert the battery properly.
- Do not dismantle or modify the charger or use it for any other purpose.
- Keep the charger out of reach of children. Children should use the battery charger only under adult supervision.

Guarantee Period: 12 months